

Multi Dock Data Sheet



Version: 1.0

Date: 05/02/2015 www.axivity.com



Multi Dock

7 - Port Micro USB

Description

The Multi Dock provides a convenient way to simultaneously charge, configure and download up to 7 sensors at once. The Multi Dock is fully USB 3.0 Super-Speed compliant for upstream data, and supports simultaneous USB 2.0 High Speed downstream connections to all sensors with a micro USB port.

Applications

- Clinical Trials
- Sports Research
- Medical Research
- Large Scale Data Collection

Summary

- · Wipe clean acrylic surface
- · Simultaneous charging and configuration
- · Zero configuration needed
- Mains powered
- Works with all PC's, laptops and netbooks






Specification: Multi Dock

PARAMETER	VALUE	NOTES
Dimensions	214 x 97 x 94mm	
Material	Acrylic	
Weight	450g	
Power	5V DC 2A	2.1mm +ve tipped jack
Included Adaptor	115/230V switching	UK Plug
Operating Temperature	0 - 40 °C	
Input	USB 3.0 type A male	
Ports	7 x USB 3.0 type A ports	
Outputs	USB-micro type A male	


^{*} Colour of USB cables may vary.

Multi Dock Maintenance

Over time, your dock and USB ports may become dirty from use or clogged with debris. To clean them, we recommend you use a contact cleaner (such as Ambersil Contact Cleaner) and a soft brush.

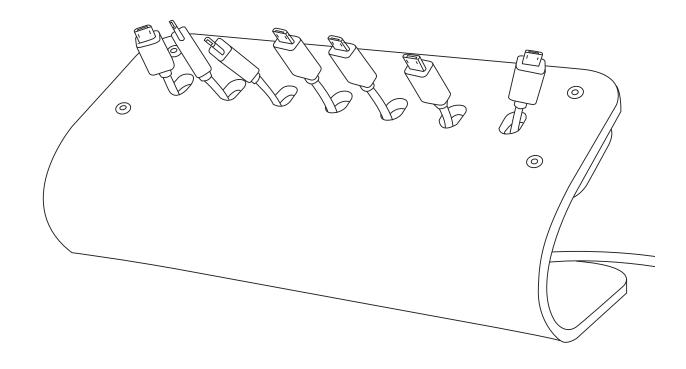



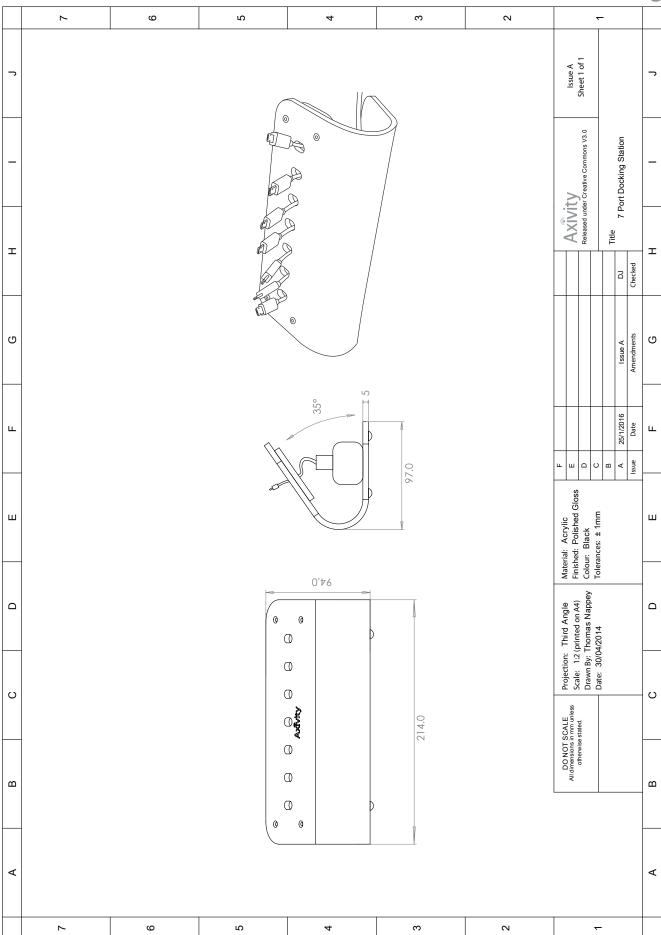



Certification:

The Multi Dock is certified to the following:

Certification	Test
RoHS 2002/95/EC	This product is compliant with European Union RoHS (2011/65/EU) directive which restricts the use of lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) in electrical and electronic equipment put on the market in the European Union.
	In accordance with the European Directive 2002/96/ EC on Waste Electrical and Electronic Equipment (WEEE), the product must not be disposed of in the normal unsorted municipal waste stream. Instead, it is the user's responsibility to dispose of this product by returning it to a collection point or directly to Axivity. Separate collection of this waste helps optimize the recovery and recycling of any reclaimable materials and also reduces the impact on human health and the environment. For more information concerning the correct disposal of this product, please contact your local authority or our issuing authority The lithium polymer cell has met the acceptance criterion for the UN Recommendations on the Transport or Dangerous Goods relating to lithium batteries, reference Para 38.3 of Manual tests and Criteria document No. ST/SG/AC.10.11/Rev.4:2003



Disclaimer:

Information in this document is believed to be accurate and reliable. However, the manufacturer does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. The manufacturer reserves the right to make changes to information published in this document, including without limitation, specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. The manufacturer's products are not designed, authorized or warranted to be suitable for use in applications where failure or malfunction can reasonably be expected to result in personal injury, death or severe property or environmental damage. The manufacturer accepts no liability for inclusion and/or use of its products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.